



NF Ferrule Quick Fittings

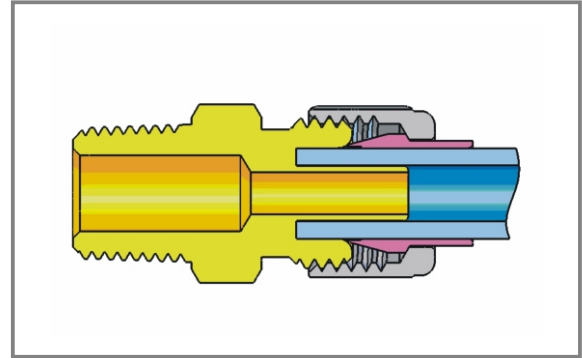

NF series
Ferrule Quick Fittings
快插式系列

NF Ferrule Quick Fittings 快插式系列

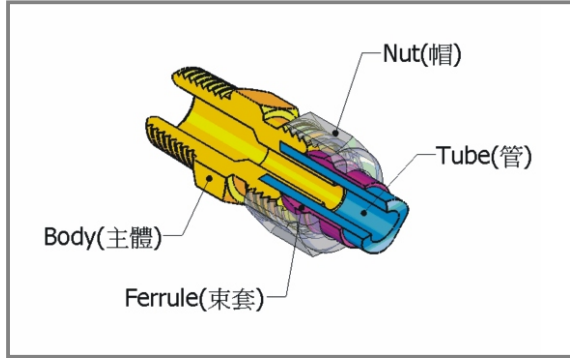

特點

應用於低壓之氣體，水或油之傳遞。
大多數使用於尼龍管，PE或PU管的配接，容易組裝。

材質

接頭、螺帽均採用黃銅JIS3604材質加工而成。
彎頭、三通均採用黃銅JIS3771材質鍛造並加工而成。
束套有JIS3604與尼龍材質兩種。

工作溫度

使用尼龍束套時，
空氣、油 -40°C~ 80°C，
水 0°C~ 70°C。

工作壓力

根據軟管可使用的壓力而定。

組裝步驟

1. 正交的剪切管到所需長度。
最大可接受15°的偏差許可。
2. 先將螺帽與束套組裝至主體上。
3. 確認主體與組合元件均乾淨無污。
4. 插入軟管至接頭內底端。
5. 先用手旋緊與主體，然後再用板手順時鐘旋緊
1/2~1圈，即組裝完成。

Characteristic

Use for air, water, oil in low pressure.
Use with nylon tubing PE or PU tubing, can be assembled easily.

Material

All connector, nut are machined from brass JIS3604
All elbow, tee are forged and machined from brass JIS3771
Ferrule are made of brass JIS3604 or Nylon

Working Temperature

Use with nylon ferrule,
From -40°F~176°F for air, oil
From 32°F~158°F for water







Working Pressure

Depending on the max.operation pressure of the tubing used.




Assembly Instruction

1. Cut tubing squarely-maximum of 15° angle allowance.
2. Assemble nut and ferrule to body.
3. Check that body or mating part is clean and free of debris.
4. Insert tubing into fitting until it bottoms on seat.
5. The nut should be screwed down finger tight, then the wrench-tightened 1 / 2~1 turns.

Adapter

<p>NF00 螺帽 Nut</p>  <p>Page NF 3</p>	<p>NF12 銅束套 Brass Ferrule</p>  <p>Page NF 3</p>	<p>NF12-NL 尼龍束套 Nylon Ferrule</p>  <p>Page NF 3</p>	<p>NF01 由任接頭 Union</p>  <p>Page NF 4</p>	<p>NF03 外牙接頭 Male Connector</p>  <p>Page NF 5</p>	<p>NF04 內牙接頭 Female Connector</p>  <p>Page NF 6</p>
--	---	---	---	---	---

Elbow

<p>NF09 由任彎頭 Union Elbow</p>  <p>Page NF 11</p>	<p>NF06 外牙彎頭 Male Elbow</p>  <p>Page NF 8</p>	<p>NF05 內牙彎頭 Female Elbow</p>  <p>Page NF 7</p>			
---	---	---	--	--	--

Tee

<p>NF02 由任三通 Union Tee</p>  <p>Page NF 4</p>	<p>NF07 牙邊三通 Run Tee</p>  <p>Page NF 9</p>	<p>NF08 牙中三通 Branch Tee</p>  <p>Page NF 10</p>			
--	--	--	--	--	--

A/E
Pipe Fittings

A/E
Hose Barb

H
45° Flared

S
Compression

S/B
Bite Type

N
Fast-In Fittings


NF
Ferrule Quick

P
Push-In Fittings

V
Valves

NF00

螺帽 Nut




產品編號	適用管徑 D	直牙 T	L	HEX	I.D
PART NO.	TubeSize D	Thread T			
NF00-04	4	M8×1.0	8.5	9.5	5.4
NF00-06-2	6	M11×1.0	9	12	7.8
NF00-08-25	8	1/2-24	9.5	14	9.4
NF00-10-3	10	9/16-24	10.5	15.9	11.4
NF00-12-4	12	11/16-20	11.5	19	14.1

產品編號	適用管徑 D	直牙 T	L	HEX	I.D
PART NO.	TubeSize D	Thread T			
NF00-06-2	1/4	M11×1.0	9	12	7.8
NF00-08-25	5/16	1/2-24	9.5	14	9.4
NF00-10-3	3/8	9/16-24	10.5	15.9	11.4
NF00-12-4	1/2	11/16-20	11.5	19	14.1

NF12

銅束套(尼龍束套) Brass Ferrule(Nylon Ferrule)




產品編號	適用管徑 D	D1	L	I.D
PART NO.	TubeSize D			
NF12-04(NL)	4	6.4	8	4.2
NF12-06(NL)	6	8.5	9	6.2
NF12-25(NL)	8	10.5	9	8.2
NF12-10(NL)	10	12.5	10.5	10.2
NF12-12(NL)	12	15.3	11	12.2

產品編號	適用管徑 D	D1	L	I.D
PART NO.	TubeSize D			
NF12-2(NL)	1/4	8.5	9	6.5
NF12-25(NL)	5/16	10.5	9	8.2
NF12-3(NL)	3/8	12.5	10.5	9.8
NF12-4(NL)	1/2	15.3	11	12.9

NF01

由任銅束套接頭(配尼龍束套) **Union with brass ferrule(with nylon ferrule)**




產品編號	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	TubeSize D1	Thread					
NF01-C04(NL)	4	M8×1.0	2.4	25.5	9.5	8	1.6
NF01-C06(NL)	6	M11×1.0	3.9	28	12	11	3
NF01-C25(NL)	8	1/2-24	4.9	29	14	12.7	4
NF01-C10(NL)	10	9/16-24	6.4	29	15.9	14.3	5.2
NF01-C12(NL)	12	11/16-20	7.9	34	19	17.5	6.5

產品編號	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	TubeSize D1	Thread					
NF01-C2(NL)	1/4	M11×1.0	3.9	28	12	11	3
NF01-C25(NL)	5/16	1/2-24	4.9	29	14	12.7	4
NF01-C3(NL)	3/8	9/16-24	6.4	29	15.9	14.3	5.2
NF01-C4(NL)	1/2	11/16-20	9.5	34	19	17.5	8

NF02

由任銅束套三通(配尼龍束套) **Union Tee with brass ferrule(with nylon ferrule)**



產品編號	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	TubeSize D1	Thread					
NF02-T06(NL)	6	M11×1.0	3.9	20.5	12	8.5	3
NF02-T25(NL)	8	1/2-24	4.9	21.5	14	8.5	4
NF02-T10(NL)	10	9/16-24	6.4	22	15.9	10	5.2
NF02-T12(NL)	12	11/16-20	7.9	26	19	12	6.5

產品編號	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	TubeSize D1	Thread					
NF02-T2(NL)	1/4	M11×1.0	3.9	20.5	12	8.5	3
NF02-T25(NL)	5/16	1/2-24	4.9	21.5	14	8.5	4
NF02-T3(NL)	3/8	9/16-24	6.4	22	15.9	10	5.2
NF02-T4(NL)	1/2	11/16-20	9.5	26	19	12	8

A / E Pipe Fittings

A / E Hose Barb

H 45° Flared

S Compression

S B Bite Type

N Fast-In Fittings


N F Ferrule Quick

P Push-In Fittings

V Valves

NF03

外牙銅束套接頭(配尼龍束套) Male Connector with brass ferrule(with nylon ferrule)




產品編號	管牙 T	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread					
NF03-C1004(NL)	1/8	4	M8×1.0	2.4	23	9.5	10	1.6
NF03-C1006(NL)	1/8	6	M11×1.0	3.9	24	12	11.1	3
NF03-C1025(NL)	1/8	8	1/2-24	4.9	24.5	14	12.7	4
NF03-C1010(NL)	1/8	10	9/16-24	6.4	24.5	15.9	14.3	5.2
NF03-C2006(NL)	1/4	6	M11×1.0	3.9	27.5	12	14	3
NF03-C2025(NL)	1/4	8	1/2-24	4.9	28	14	14	4
NF03-C2010(NL)	1/4	10	9/16-24	6.4	28	15.9	14.3	5.2
NF03-C2012(NL)	1/4	12	11/16-20	7.9	31	19	17.5	6.5
NF03-C3006(NL)	3/8	6	M11×1.0	3.9	27.5	12	17	3
NF03-C3025(NL)	3/8	8	1/2-24	4.9	28	14	17	4
NF03-C3010(NL)	3/8	10	9/16-24	6.4	28	15.9	17	5.2
NF03-C3012(NL)	3/8	12	11/16-20	7.9	31	19	17.5	6.5
NF03-C4006(NL)	1/2	6	M11×1.0	3.9	31	12	21	3
NF03-C4025(NL)	1/2	8	1/2-24	4.9	31.5	14	21	4
NF03-C4010(NL)	1/2	10	9/16-24	6.4	31.5	15.9	21	5.2
NF03-C4012(NL)	1/2	12	11/16-20	7.9	33.5	19	21	6.5

產品編號	管牙 T	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread					
NF03-C102(NL)	1/8	1/4	M11×1.0	3.9	24	12	11.1	3
NF03-C1025(NL)	1/8	5/16	1/2-24	4.9	24.5	14	12.7	4
NF03-C103(NL)	1/8	3/8	9/16-24	6.4	24.5	15.9	14.3	5.2
NF03-C202(NL)	1/4	1/4	M11×1.0	3.9	27.5	12	14	3
NF03-C2025(NL)	1/4	5/16	1/2-24	4.9	28	14	14	4
NF03-C203(NL)	1/4	3/8	9/16-24	6.4	28	15.9	14.3	5.2
NF03-C204(NL)	1/4	1/2	11/16-20	9.5	31	19	17.5	8
NF03-C302(NL)	3/8	1/4	M11×1.0	3.9	27.5	12	17	3
NF03-C3025(NL)	3/8	5/16	1/2-24	4.9	28	14	17	4
NF03-C303(NL)	3/8	3/8	9/16-24	6.4	28	15.9	17	5.2
NF03-C304(NL)	3/8	1/2	11/16-20	9.5	31	19	17.5	8
NF03-C402(NL)	1/2	1/4	M11×1.0	3.9	31	12	21	3
NF03-C4025(NL)	1/2	5/16	1/2-24	4.9	31.5	14	21	4
NF03-C403(NL)	1/2	3/8	9/16-24	6.4	31.5	15.9	21	5.2
NF03-C404(NL)	1/2	1/2	11/16-20	9.5	33.5	19	21	8

A / E
Pipe FittingsA / E
Hose BarbH
45° FlaredS
CompressionS B
Bite TypeN
Fast-In FittingsN F
Ferrule QuickP
Push-In FittingsV
Valves

NF04

內牙銅束套接頭(配尼龍束套) Female Connector with brass ferrule(with nylon ferrule)



產品編號	內管牙 T	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread					
NF04-CM1004(NL)	1/8	4	M8×1.0	2.4	22	9.5	12	1.6
NF04-CM1006(NL)	1/8	6	M11×1.0	3.9	22.5	12	12	3
NF04-CM1025(NL)	1/8	8	1/2-24	4.9	23	14	12.7	4
NF04-CM1010(NL)	1/8	10	9/16-24	6.4	23	15.9	14.3	5.2
NF04-CM2004(NL)	1/4	4	M8×1.0	2.4	25	9.5	17	1.6
NF04-CM2006(NL)	1/4	6	M11×1.0	3.9	25.5	12	17	3
NF04-CM2025(NL)	1/4	8	1/2-24	4.9	26	14	17	4
NF04-CM2010(NL)	1/4	10	9/16-24	6.4	26	15.9	17	5.2
NF04-CM2012(NL)	1/4	12	11/16-20	7.9	28	19	17.5	6.5
NF04-CM3006(NL)	3/8	6	M11×1.0	3.9	25.5	12	21	3
NF04-CM3025(NL)	3/8	8	1/2-24	4.9	26	14	21	4
NF04-CM3010(NL)	3/8	10	9/16-24	6.4	26	15.9	21	5.2
NF04-CM3012(NL)	3/8	12	11/16-20	7.9	28	19	21	6.5

產品編號	內管牙 T	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread					
NF04-CM102(NL)	1/8	1/4	M11×1.0	3.9	22.5	12	12	3
NF04-CM1025(NL)	1/8	5/16	1/2-24	4.9	23	14	12.7	4
NF04-CM103(NL)	1/8	3/8	9/16-24	6.4	23	15.9	14.3	5.2
NF04-CM202(NL)	1/4	1/4	M11×1.0	3.9	25.5	12	17	3
NF04-CM2025(NL)	1/4	5/16	1/2-24	4.9	26	14	17	4
NF04-CM203(NL)	1/4	3/8	9/16-24	6.4	26	15.9	17	5.2
NF04-CM204(NL)	1/4	1/2	11/16-20	9.5	28	19	17.5	8
NF04-CM302(NL)	3/8	1/4	M11×1.0	3.9	25.5	12	21	3
NF04-CM3025(NL)	3/8	5/16	1/2-24	4.9	26	14	21	4
NF04-CM303(NL)	3/8	3/8	9/16-24	6.4	26	15.9	21	5.2
NF04-CM304(NL)	3/8	1/2	11/16-20	9.5	28	19	21	8

A/E Pipe Fittings

A/E Hose Barb

H 45° Flared

S Compression

SB Bite Type

N Fast-In Fittings


NF Ferrule Quick

P Push-In Fittings

V Valves

NF05

內牙銅束套彎頭(配尼龍束套) **Female Elbow with brass ferrule(with nylon ferrule)**




產品編號	內管牙 T	適用管徑 D1	直牙	D2	L1	L2	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread						
NF05-LM1004(NL)	1/8	4	M8×1.0	2.4	23	18.4	9.5	10	1.6
NF05-LM1006(NL)	1/8	6	M11×1.0	3.9	23	19.5	12	10	3
NF05-LM1025(NL)	1/8	8	1/2-24	4.9	23	20	14	10	4
NF05-LM1010(NL)	1/8	10	9/16-24	6.4	23	21	15.9	10	5.2
NF05-LM1012(NL)	1/8	12	1/2-20	7.9	24.5	23	19	12	6.5
NF05-LM2004(NL)	1/4	4	M8×1.0	2.4	26	20	9.5	10	1.6
NF05-LM2006(NL)	1/4	6	M11×1.0	3.9	26	21	12	10	3
NF05-LM2025(NL)	1/4	8	1/2-24	4.9	26	21.5	14	10	4
NF05-LM2010(NL)	1/4	10	9/16-24	6.4	26	22.5	15.9	10	5.2
NF05-LM2012(NL)	1/4	12	11/16-20	7.9	27	25	19	12	6.5
NF05-LM3006(NL)	3/8	6	M11×1.0	3.9	28	23	12	14	3
NF05-LM3025(NL)	3/8	8	1/2-24	4.9	28	23.5	14	14	4
NF05-LM3010(NL)	3/8	10	9/16-24	6.4	28	24.5	15.9	14	5.2
NF05-LM3012(NL)	3/8	12	11/16-20	7.9	28	26	19	14	6.5

產品編號	內管牙 T	適用管徑 D1	直牙	D2	L1	L2	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread						
NF05-LM102(NL)	1/8	1/4	M11×1.0	3.9	23	19.5	12	10	3
NF05-LM1025(NL)	1/8	5/16	1/2-24	4.9	23	20	14	10	4
NF05-LM103(NL)	1/8	3/8	9/16-24	6.4	23	21	15.9	10	5.2
NF05-LM104(NL)	1/8	1/2	1/2-20	9.5	24.5	23	19	12	8
NF05-LM202(NL)	1/4	1/4	M11×1.0	3.9	26	21	12	10	3
NF05-LM2025(NL)	1/4	5/16	1/2-24	4.9	26	21.5	14	10	4
NF05-LM203(NL)	1/4	3/8	9/16-24	6.4	26	22.5	15.9	10	5.2
NF05-LM204(NL)	1/4	1/2	11/16-20	9.5	27	25	19	12	8
NF05-LM302(NL)	3/8	1/4	M11×1.0	3.9	28	23	12	14	3
NF05-LM3025(NL)	3/8	5/16	1/2-24	4.9	28	23.5	14	14	4
NF05-LM303(NL)	3/8	3/8	9/16-24	6.4	28	24.5	15.9	14	5.2
NF05-LM304(NL)	3/8	1/2	11/16-20	9.5	28	26	19	14	8

A / E
Pipe FittingsA / E
Hose BarbH
45° FlaredS
CompressionS B
Bite TypeN
Fast-In FittingsN F
Ferrule QuickP
Push-In FittingsV
Valves

NF06

外牙銅束套彎頭(配尼龍束套) **Male Elbow with brass ferrule (with nylon ferrule)**



產品編號	管牙 T	適用管徑 D1	直牙	D2	L1	L2	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread						
NF06-L1004(NL)	1/8	4	M8×1.0	2.4	16.9	17	9.5	8.5	1.6
NF06-L1006(NL)	1/8	6	M11×1.0	3.9	16.9	18.7	12	8.5	3
NF06-L1025(NL)	1/8	8	1/2-24	4.9	16.9	19.5	14	8.5	4
NF06-L1010(NL)	1/8	10	9/16-24	6.4	17.9	20.5	15.9	8.5	5.2
NF06-L2004(NL)	1/4	4	M8×1.0	2.4	21.5	18.4	9.5	10	1.6
NF06-L2006(NL)	1/4	6	M11×1.0	3.9	23	19.5	12	10	3
NF06-L2025(NL)	1/4	8	1/2-24	4.9	23	20	14	10	4
NF06-L2010(NL)	1/4	10	9/16-24	6.4	23	21	15.9	10	5.2
NF06-L2012(NL)	1/4	12	11/16-20	7.9	24.5	23	19	12	6.5
NF06-L3006(NL)	3/8	6	M11×1.0	3.9	23	21	12	10	3
NF06-L3025(NL)	3/8	8	1/2-24	4.9	23	21.5	14	10	4
NF06-L3010(NL)	3/8	10	9/16-24	6.4	23	22.5	15.9	10	5.2
NF06-L3012(NL)	3/8	12	11/16-20	7.9	24	25	19	12	6.5
NF06-L4006(NL)	1/2	6	M11×1.0	3.9	28.5	23	12	14	3
NF06-L4025(NL)	1/2	8	1/2-24	4.9	28.5	23.5	14	14	4
NF06-L4010(NL)	1/2	10	9/16-24	6.4	28.5	24.5	15.9	14	5.2
NF06-L4012(NL)	1/2	12	11/16-20	7.9	28.5	26	19	14	6.5

產品編號	管牙 T	適用管徑 D1	直牙	D2	L1	L2	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread						
NF06-L102(NL)	1/8	1/4	M11×1.0	3.9	16.9	18.7	12	8.5	3
NF06-L1025(NL)	1/8	5/16	1/2-24	4.9	16.9	19.5	14	8.5	4
NF06-L103(NL)	1/8	3/8	9/16-24	6.4	17.9	20.5	15.9	8.5	5.2
NF06-L202(NL)	1/4	1/4	M11×1.0	3.9	23	19.5	12	10	3
NF06-L2025(NL)	1/4	5/16	1/2-24	4.9	23	20	14	10	4
NF06-L203(NL)	1/4	3/8	9/16-24	6.4	23	21	15.9	10	5.2
NF06-L204(NL)	1/4	1/2	11/16-20	9.5	24.5	23	19	12	8
NF06-L302(NL)	3/8	1/4	M11×1.0	3.9	23	21	12	10	3
NF06-L3025(NL)	3/8	5/16	1/2-24	4.9	23	21.5	14	10	4
NF06-L303(NL)	3/8	3/8	9/16-24	6.4	23	22.5	15.9	10	5.2
NF06-L304(NL)	3/8	1/2	11/16-20	9.5	24	25	19	12	8
NF06-L402(NL)	1/2	1/4	M11×1.0	3.9	28.5	23	12	14	3
NF06-L4025(NL)	1/2	5/16	1/2-24	4.9	28.5	23.5	14	14	4
NF06-L403(NL)	1/2	3/8	9/16-24	6.4	28.5	24.5	15.9	14	5.2
NF06-L404(NL)	1/2	1/2	11/16-20	9.5	28.5	26	9.5	14	8

A/E Pipe Fittings

A/E Hose Barb

H Flared 45°

S Compression

SB Bite Type

N Fast-In Fittings


NF Ferrule Quick

P Push-In Fittings

V Valves

NF07

牙邊銅束套三通(配尼龍束套) Run Tee with brass ferrule (with nylon ferrule)




產品編號	管牙 T	適用管徑 D1	直牙	D2	L1	L2	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread						
NF07-T1006(NL)	1/8	6	M11×1.0	3.9	18	20.5	12	8.5	3
NF07-T1025(NL)	1/8	8	1/2-24	4.9	18	21.5	14	8.5	4
NF07-T1010(NL)	1/8	10	9/16-24	6.4	18	22	15.9	10	5.2
NF07-T2006(NL)	1/4	6	M11×1.0	3.9	22.5	20.5	12	10	3
NF07-T2025(NL)	1/4	8	1/2-24	4.9	22.5	21	14	10	4
NF07-T2010(NL)	1/4	10	9/16-24	6.4	22.5	22	15.9	10	5.2
NF07-T2012(NL)	1/4	12	11/16-20	7.9	24	26.5	19	12	6.5
NF07-T3006(NL)	3/8	6	M11×1.0	3.9	22.5	20.5	12	10	3
NF07-T3025(NL)	3/8	8	1/2-24	4.9	22.5	21	14	10	4
NF07-T3010(NL)	3/8	10	9/16-24	6.4	22.5	22	15.9	10	5.2
NF07-T3012(NL)	3/8	12	11/16-20	7.9	24.5	26.5	19	12	6.5
NF07-T4006(NL)	1/2	6	M11×1.0	3.9	27.5	23	12	14	3
NF07-T4025(NL)	1/2	8	1/2-24	4.9	27.5	23.5	14	14	4
NF07-T4010(NL)	1/2	10	9/16-24	6.4	27.5	24.5	15.9	14	5.2
NF07-T4012(NL)	1/2	12	11/16-20	7.9	29.5	26.5	19	14	6.5

產品編號	管牙 T	適用管徑 D1	直牙	D2	L1	L2	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread						
NF07-T102(NL)	1/8	1/4	M11×1.0	3.9	18	20.5	12	8.5	3
NF07-T1025(NL)	1/8	5/16	1/2-24	4.9	18	21.5	14	8.5	4
NF07-T103(NL)	1/8	3/8	9/16-24	6.4	18	22	15.9	10	5.2
NF07-T202(NL)	1/4	1/4	M11×1.0	3.9	22.5	20.5	12	10	3
NF07-T2025(NL)	1/4	5/16	1/2-24	4.9	22.5	21	14	10	4
NF07-T203(NL)	1/4	3/8	9/16-24	6.4	22.5	22	15.9	10	5.2
NF07-T204(NL)	1/4	1/2	11/16-20	9.5	24	26.5	19	12	8
NF07-T302(NL)	3/8	1/4	M11×1.0	3.9	22.5	20.5	12	10	3
NF07-T3025(NL)	3/8	5/16	1/2-24	4.9	22.5	21	14	10	4
NF07-T303(NL)	3/8	3/8	9/16-24	6.4	22.5	22	15.9	10	5.2
NF07-T304(NL)	3/8	1/2	11/16-20	9.5	24.5	26.5	19	12	8
NF07-T402(NL)	1/2	1/4	M11×1.0	3.9	27.5	23	12	14	3
NF07-T4025(NL)	1/2	5/16	1/2-24	4.9	27.5	23.5	14	14	4
NF07-T403(NL)	1/2	3/8	9/16-24	6.4	27.5	24.5	15.9	14	5.2
NF07-T404(NL)	1/2	1/2	11/16-20	9.5	29.5	26.5	19	14	8

A / E
Pipe FittingsA / E
Hose BarbH
45° FlaredS
CompressionS B
Bite TypeN
Fast-In FittingsN F
Ferrule QuickP
Push-In FittingsV
Valves

NF08

牙中銅束套三通(配尼龍束套) **Branch Tee with brass ferrule (with nylon ferrule)**



產品編號	管牙 T	適用管徑 D1	直牙	D2	L1	L2	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread						
NF08-T1006(NL)	1/8	6	M11×1.0	3.9	18	20.5	12	8.5	3
NF08-T1025(NL)	1/8	8	1/2-24	4.9	18	21.5	14	8.5	4
NF08-T1010(NL)	1/8	10	9/16-24	6.4	18	22	15.9	10	5.2
NF08-T2006(NL)	1/4	6	M11×1.0	3.9	22.5	20.5	12	10	3
NF08-T2025(NL)	1/4	8	1/2-24	4.9	22.5	21	14	10	4
NF08-T2010(NL)	1/4	10	9/16-24	6.4	22.5	22	15.9	10	5.2
NF08-T2012(NL)	1/4	12	11/16-20	7.9	24	26.5	19	12	6.5
NF08-T3006(NL)	3/8	6	M11×1.0	3.9	22.5	20.5	12	10	3
NF08-T3025(NL)	3/8	8	1/2-24	4.9	22.5	21	14	10	4
NF08-T3010(NL)	3/8	10	9/16-24	6.4	22.5	22	15.9	10	5.2
NF08-T3012(NL)	3/8	12	11/16-20	7.9	24.5	26.5	19	12	6.5
NF08-T4006(NL)	1/2	6	M11×1.0	3.9	27.5	23	12	14	3
NF08-T4025(NL)	1/2	8	1/2-24	4.9	27.5	23.5	14	14	4
NF08-T4010(NL)	1/2	10	9/16-24	6.4	27.5	24.5	15.9	14	5.2
NF08-T4012(NL)	1/2	12	11/16-20	7.9	29.5	26.5	19	14	6.5

產品編號	管牙 T	適用管徑 D1	直牙	D2	L1	L2	HEX1	HEX2	I.D
PART NO.	PipeThread T	TubeSize D1	Thread						
NF08-T102(NL)	1/8	1/4	M11×1.0	3.9	18	20.5	12	8.5	3
NF08-T1025(NL)	1/8	5/16	1/2-24	4.9	18	21.5	14	8.5	4
NF08-T103(NL)	1/8	3/8	9/16-24	6.4	18	22	15.9	10	5.2
NF08-T202(NL)	1/4	1/4	M11×1.0	3.9	22.5	20.5	12	10	3
NF08-T2025(NL)	1/4	5/16	1/2-24	4.9	22.5	21	14	10	4
NF08-T203(NL)	1/4	3/8	9/16-24	6.4	22.5	22	15.9	10	5.2
NF08-T204(NL)	1/4	1/2	11/16-20	9.5	24	26.5	19	12	8
NF08-T302(NL)	3/8	1/4	M11×1.0	3.9	22.5	20.5	12	10	3
NF08-T3025(NL)	3/8	5/16	1/2-24	4.9	22.5	21	14	10	4
NF08-T303(NL)	3/8	3/8	9/16-24	6.4	22.5	22	15.9	10	5.2
NF08-T304(NL)	3/8	1/2	11/16-20	9.5	24.5	26.5	19	12	8
NF08-T402(NL)	1/2	1/4	M11×1.0	3.9	27.5	23	12	14	3
NF08-T4025(NL)	1/2	5/16	1/2-24	4.9	27.5	23.5	14	14	4
NF08-T403(NL)	1/2	3/8	9/16-24	6.4	27.5	24.5	15.9	14	5.2
NF08-T404(NL)	1/2	1/2	11/16-20	9.5	29.5	26.5	19	14	8

A / E Pipe Fittings

A / E Hose Barb

H 45° Flared

S Compression

SB Bite Type

N Fast-In Fittings


NF Ferrule Quick

P Push-In Fittings

V Valves

NF09

由任銅束套彎頭(配尼龍束套) **Union Elbow with brass ferrule (with nylon ferrule)**



產品編號	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	TubeSize D1	Thread					
NF09-L04(NL)	4	M8×1.0	2.4	18.4	9.5	8.5	1.6
NF09-L06(NL)	6	M11×1.0	3.9	20.8	12	8.5	3
NF09-L25(NL)	8	1/2-24	4.9	21.5	14	8.5	4
NF09-L10(NL)	10	9/16-24	6.4	22.5	15.9	10	5.2
NF09-L12(NL)	12	11/16-20	7.9	26.5	19	12	6.5

產品編號	適用管徑 D1	直牙	D2	L	HEX1	HEX2	I.D
PART NO.	TubeSize D1	Thread					
NF09-L2(NL)	1/4	M11×1.0	3.9	20.8	12	8.5	3
NF09-L25(NL)	5/16	1/2-24	4.9	21.5	14	8.5	4
NF09-L3(NL)	3/8	9/16-24	6.4	22.5	15.9	10	5.2
NF09-L4(NL)	1/2	11/16-20	9.5	26.5	19	12	8

A/E
Pipe Fittings

A/E
Hose Barb

H
45° Flared

S
Compression

S/B
Bite Type

N
Fast-In Fittings

NF
Ferrule Quick

P
Push-In Fittings

V
Valves